

# GXM Series


- For base station equipment and other high temperature applications.
- Endurance with ripple current : 5,000 hours at 125°C
- Rated voltage range : 400 to 450V<sub>dc</sub>, Capacitance range : 39 to 180μF
- Non solvent resistant type.
- RoHS2 Compliant

## ◆ SPECIFICATIONS

Items	Characteristics	
Category	-40 to +125°C	
Temperature Range	-40 to +125°C	
Rated Voltage Range	400 to 450V <sub>dc</sub>	
Capacitance Tolerance	±20% (M) (at 20°C, 120Hz)	
Leakage Current	I=0.04CV+100 (after 1 minute) I=0.02CV+25 (after 5 minutes) Where, I : Max. leakage current(μA), C : Nominal capacitance (μF), V : Rated voltage (V) (at 20°C)	
Dissipation Factor (tan δ)	Rated voltage (V <sub>dc</sub> )	400 to 450
	tan δ (Max.)	0.24 (at 20°C, 120Hz)
Low Temperature Characteristics	Z(-25°C) / Z(+20°C)	6max.
	Z(-40°C) / Z(+20°C)	10max. (at 120Hz)
Endurance	The following specifications shall be satisfied when the capacitors are restored to 20°C after subjected to DC voltage with the rated ripple current is applied (the peak voltage shall not exceed the rated voltage) for 5,000 hours at 125°C.	
	Capacitance change	≤ ±30% of the initial value
	D.F. (tan δ)	≤ 300% of the initial specified value
	Leakage current	≤ The initial specified value
Shelf Life	The following specifications shall be satisfied when the capacitors are restored to 20°C after exposing them for 500 hours at 125°C without voltage applied. Before the measurement, the capacitor shall be preconditioned by applying voltage according to Item 4.1 of JIS C 5101-4.	
	Capacitance change	≤ ±30% of the initial value
	D.F. (tan δ)	≤ 300% of the initial specified value
	Leakage current	≤ 500% of the initial specified value


## ◆ DIMENSIONS [mm]

- Terminal Code : E

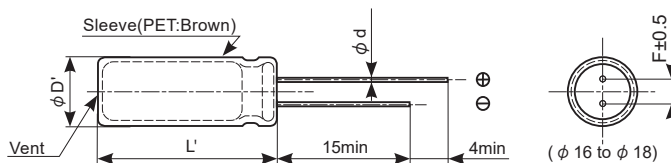

φ D	16	18
φ d	0.8	0.8
F	7.5	7.5
φ D'	φ D+0.5max.	
L'	L+2.0max.	

## ◆ PART NUMBERING SYSTEM

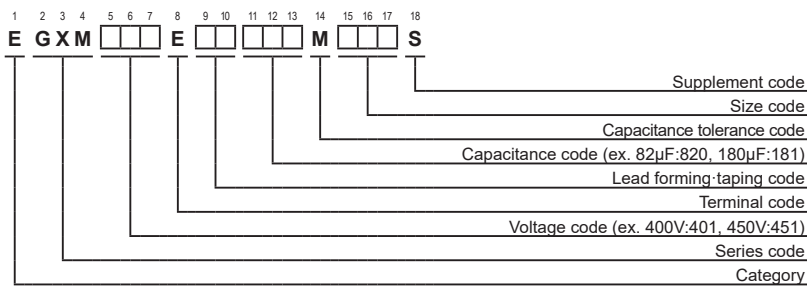



**GXM** Series

◆ STANDARD RATINGS

WV (Vdc)	Cap (μF)	Case size φ D×L(mm)	tan δ	Rated ripple current (mA <sub>rms</sub> /125°C,120Hz)	Part No.
400	47	16×20	0.24	380	EGXM401E□□470ML20S
	68	16×25	0.24	550	EGXM401E□□680ML25S
	68	18×20	0.24	480	EGXM401E□□680MM20S
	100	16×30	0.24	720	EGXM401E□□101ML30S
	100	18×25	0.24	680	EGXM401E□□101MM25S
	120	16×35	0.24	810	EGXM401E□□121ML35S
	120	16×40	0.24	830	EGXM401E□□121ML40S
	120	18×30	0.24	810	EGXM401E□□121MM30S
	150	18×35	0.24	930	EGXM401E□□151MM35S
	180	18×40	0.24	1,040	EGXM401E□□181MM40S
420	47	16×20	0.24	380	EGXM421E□□470ML20S
	56	18×20	0.24	430	EGXM421E□□560MM20S
	68	16×25	0.24	550	EGXM421E□□680ML25S
	82	16×30	0.24	650	EGXM421E□□820ML30S
	82	18×25	0.24	620	EGXM421E□□820MM25S
	100	16×35	0.24	730	EGXM421E□□101ML35S
	120	16×40	0.24	830	EGXM421E□□121ML40S
	120	18×30	0.24	810	EGXM421E□□121MM30S
	120	18×35	0.24	830	EGXM421E□□121MM35S
	150	18×40	0.24	950	EGXM421E□□151MM40S
450	39	16×20	0.24	340	EGXM451E□□390ML20S
	56	16×25	0.24	500	EGXM451E□□560ML25S
	56	18×20	0.24	430	EGXM451E□□560MM20S
	82	16×30	0.24	650	EGXM451E□□820ML30S
	82	18×25	0.24	620	EGXM451E□□820MM25S
	100	16×35	0.24	730	EGXM451E□□101ML35S
	100	16×40	0.24	760	EGXM451E□□101ML40S
	100	18×30	0.24	740	EGXM451E□□101MM30S
	120	18×35	0.24	830	EGXM451E□□121MM35S
	150	18×40	0.24	950	EGXM451E□□151MM40S

□□ :Enter the appropriate lead forming or taping code.

◆ RATED RIPPLE CURRENT MULTIPLIERS

•Frequency Multipliers

Capacitance (μF)	Frequency (Hz)			
	120	1k	10k	100k
39 to 82	1.00	1.60	2.20	2.50
100 to 180	1.00	1.50	2.00	2.25

Please contact us for lifetime estimation.

The deterioration of aluminum electrolytic capacitors accelerates their life due to the internal heating produced by ripple current. For details, refer to Section "5-3 Ripple Current Effect on Lifetime" in the catalog, Technical Note.